

## WZ industrial thermal resistance



Nanjing Hangjia Electronic Technology Co., Ltd.

## Overview

As a sensor for measuring temperature, thermal resistances are usually used in conjunction with display instruments, recording instruments and electronic regulators. It can directly measure the surface temperature of liquid, steam and gas media as well as solids in various production processes ranging from -200°C to 500°C.

## Features

- ◆ High quality temperature sensing elements, stable and reliable performance.
- ◆ High mechanical strength and good pressure resistance
- ◆ High measurement accuracy
- ◆ No need for compensation wires, convenient and economical

## Technical Parameters

### Temperature measurement range and accuracy

Thermal resistance category	Measuring Range °C	Grading	deviation $\Delta t$ °C
WZP type platinum resistor	-200～500	Pt100	B class deviation $\pm (0.3+0.005   t   )$
			A class deviation $\pm (0.15+0.002   t   )$
WZC type copper resistor	-150～100	Cu50	-50～100°C deviation $\pm (0.30+6.0 \times 10^{-3}t)$

Note: "t" in the formula is the absolute value of the actual measured temperature of the temperature sensing element.

### Thermal response time

When there is a step change in temperature, the time required for the output of the thermal resistor to change to 50% of the step change is called the thermal response time and is represented by  $T_{0.5}$ .

	Protection tube diameter (Unit: mm)	Protective tube material	Thermal response time $T_{0.5}$ (Unit: s)
Platinum thermal resistance	Φ12	1Cr18Ni9Ti	30～90
	Φ16		30～90
	Tapered protective tube		90～180
Copper thermal resistance	Φ12		<180

Minimum insertion depth of thermal resistor

$$l_{\min} = l_s + 15D$$

$l_{\min}$ : Minimum available insertion depth


$l_s$ : length of temperature sensing element

D: Outer diameter of protective tube


Insulation resistance

The insulation resistance value at room temperature is no less than  $100M\ \Omega$  when DC  $10\sim100V$  is any value, the ambient temperature is within the range of  $15\sim35\ ^\circ C$ , and the relative humidity not be greater than 80%.

## Structure Drawings (Unit: mm)

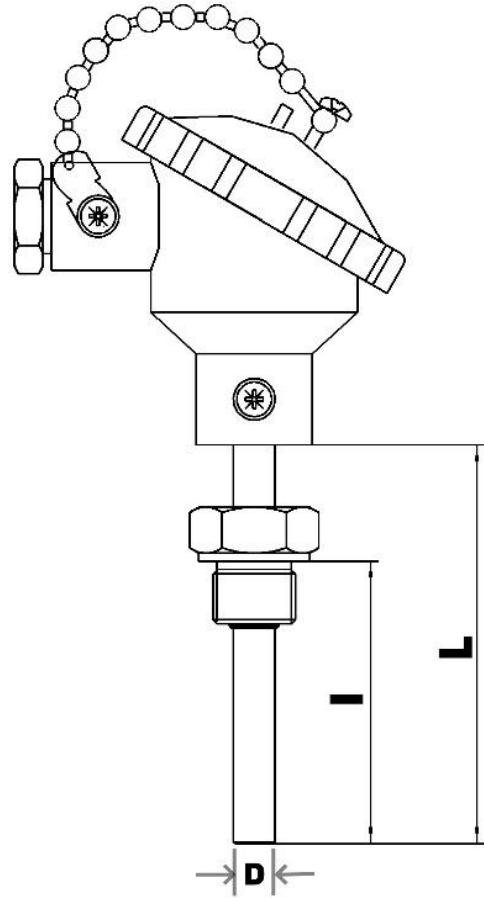

## Installation

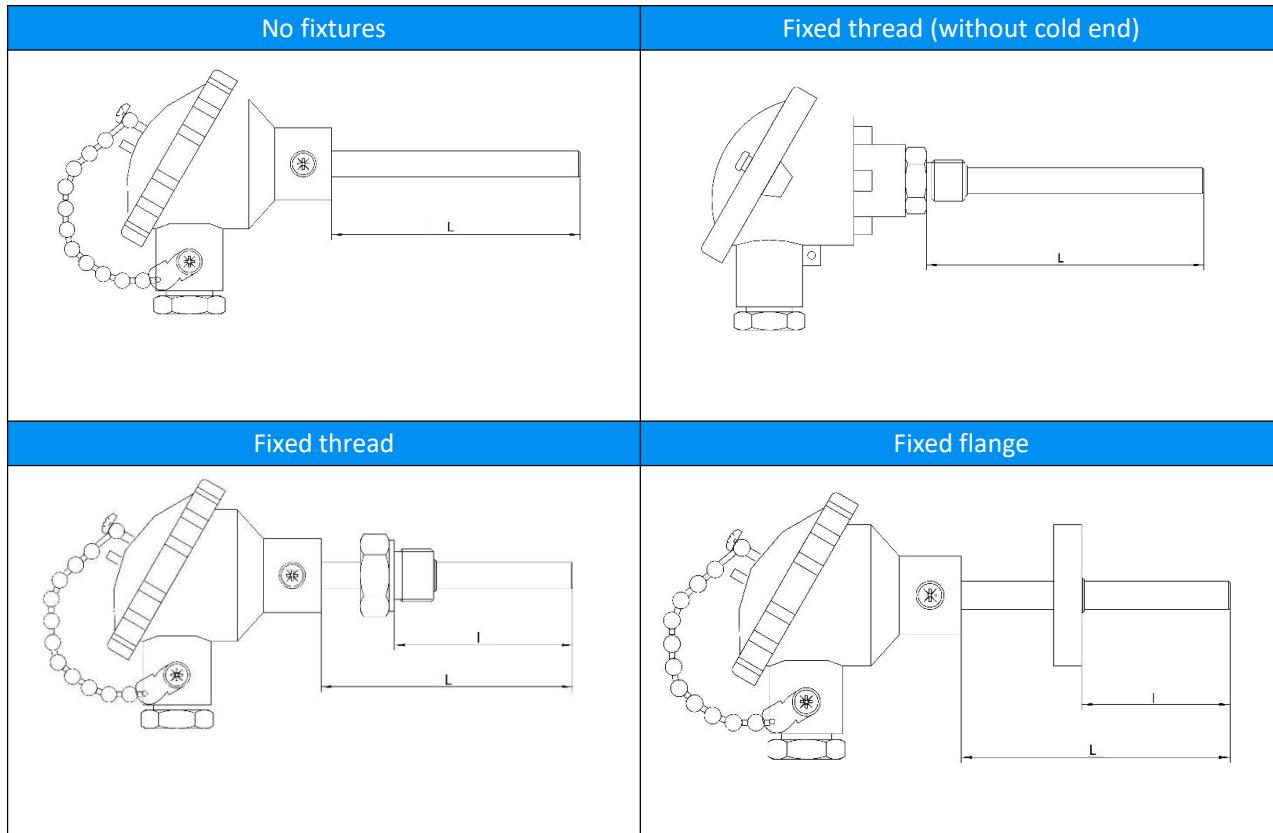

## Ordering Guide

Item NO	Type	WZ				
	Thermal resistance					
Code	Sensor					
P	R100					
	Code	Number of Wires				
	NA	Single				
	2	Duplex				
	Code	Installation Way				
	1	No fixing				
	2	Fixed thread				
	3	Movable flange				
	4	Fixed flange				
	6	Tr-clamp				
	Code	Junction box				
	3	Waterproof				
	4	Explosion-proof				
	Code	Probe diameter				
	0	16mm				
	1	12mm				
	X	Fill out X directly				
	Code	Probe Material				
	S4	SS304				
	S6	SS316L				
	Code	Number of wires				
	2	2-wire				
	3	3-wire				
	Code	Process connection				
	N	No fixing				
	P1	M20x1.5				
	P4	G1/2				
	P17	M27x2				
	P22	M16x1.5				
	K1	1.5"(60.5mm) clamp				
	K2	2"(64mm) clamp				
	F20	DN20 Flange				
	F50	DN65 Flange				
	Code	Others				
	I	I=insertion depth(mm)				
	Φ	Φ=Tube diameter(mm)				
	L	L=Total length of protective tube(mm)				
	T	Temperature range T=(t1,t2)				